

Panasonic
ideas for life

Vandal Proof
Network Color Dome Camera
(with Low-Light B/W Mode)

WV-NW474S



Network Interface

Vandal Proof

Weather Proof

Day/Night Operation

The Perfect vandal proof camera solution ...



**NETWORK
CAMERA**

**READY
TUFF**

SDIITM
Super Dynamic

A color vandal proof camera designed for broadband networks.

The new WV-NW474S is the latest addition to Panasonic's full line of vandal proof cameras and can be connected directly to both digital and analog networks. Connected to an Ethernet port, you can monitor its output or adjust settings from a networked PC. An analog interface is also provided, allowing you to connect it to existing coaxial cable-based surveillance system. The ultra-tough, vandal proof body is loaded with features you want. Complete with a 2x variable-focal lens, Super Dynamic II technology, and automatic Day/Night switching for 24-hour monitoring. Plus, with its new networking capabilities, the WV-NW474S is just the solution you need for a variety of security applications.



Both an analog video output and a digital Ethernet port are available.

Network Interface



Vandal Proof
Network Color Dome Camera
(with Low-Light B/W Mode)

WV-NW474S

For direct attachment to walls, ceilings, eaves



FEATURE LOADED


Built-in network interface (10Base-T/100Base-TX)

Can be connected to an Ethernet network (10Base-T/100Base-TX) for remote monitoring by PC. (Internet interface protocol; TCP/IP, HTTP, FTP, SMTP, DNS, DDNS, DHCP, NTP and BOOTP)



24-hour surveillance with Day/Night Switching

To allow 24-hour surveillance, this camera (in high-sensitivity mode) senses darkness and switches automatically from daytime color, to nighttime black-and-white. A timer allows you to set the precise duration to meet any installation requirement. It can also be switched manually from color to black-and-white.



Full color images at 0.8 lux (0.08 fc) Black-and-white images at 0.1 lux (0.01 fc)

This camera supports full color surveillance in low-light situations (see parking lot example above), and switching to black-and-white mode allows surveillance in light as low as 0.1 lux (0.01 fc) with optional clear dome cover; WV-CW2C.

480 lines of horizontal resolution in color mode, and 570 lines in B/W mode

Equipped with a powerful 768(H) x 494(V) 1/3-type CCD, this camera delivers crisp clear images with 480 lines of horizontal resolution (in color), and 570 lines in B/W mode.

2x variable-focal lens is standard equipment

Equipped with a 2x variable-focal lens plus an additional 2x electronic zoom, these cameras can view their subjects in greater details.

With Super Dynamic II, backlighting is no problem

With a 64 times dynamic range, Panasonic's proprietary Super Dynamic II processing yields clear images even in high-contrast or backlit lighting situations.

Set the lens aperture to the bright section, and the dark section is invisible.




Digital signal technology allows images with high contrast to be seen on screen.

Set the lens aperture to the dark section, and the bright section is invisible.

Digital Motion Detector senses movement and sends an alarm signal

When the Motion Detector senses movement in the monitored image, it automatically sends an alarm signal to the system; reducing the chance of missing key images.



(Turns white only in demo mode)

Character displays title

The monitor can display title up to 16 roman letters or numbers. By allowing instant identification of pre-set camera locations, this feature can help prevent errors during emergency situations.





(All of the above photographs were taken for the purpose of these explanations; actual images may be different.)

SIMPLE TO INSTALL

Proprietary 3-D hinge makes adjustments easy

The 3-dimensional hinge (Pan, Tilt and Azimuth) allows the camera to be rotated as well as moved horizontally and vertically. Digital signal processing allows the image itself to be shifted up, down, left, right, or inverted. Choose precisely the camera angle you need; no camera makes it easier.



HEAVY DUTY CONSTRUCTION

Die-cast aluminum body : Shock Resistant

With a body made of die-cast aluminum and a dome made of 3.5mm thick polycarbonate, this camera is tough enough to resist severe shocks.

The camera lens unit is spring loaded, so the chassis can withstand external shocks.



IP66 approved : Rain and Wind Resistant

Meets IP66 International standards. With the cameras excellent dust and moisture resistance, it can be used outdoors, under building eaves.




Heater unit; WV-CW3H (Optional) Ideal for Varying Temperatures

The optional Heater Unit adjusts automatically to temperature fluctuations, helping to prevent dew condensation.




SYSTEM EXAMPLES


1 Monitoring System utilizing an Intranet

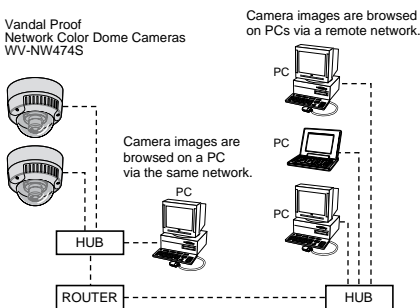

2 Monitoring with Panasonic Digital Disk Recorder; WJ-HD200

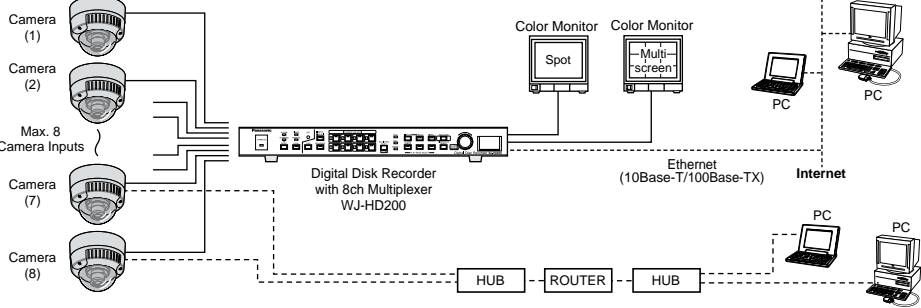

MAJOR OPERATING CONTROLS

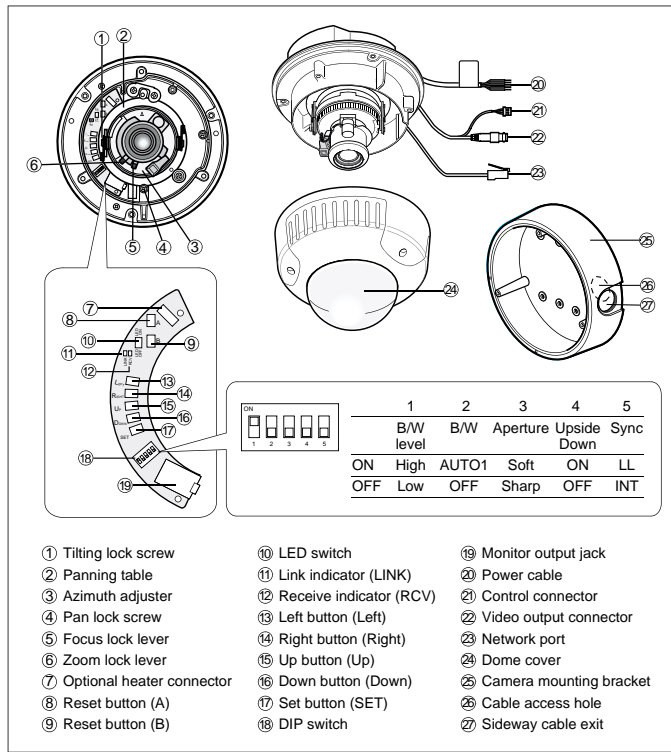

OPTIONAL COMPONENTS & ACCESSORIES

Heater Unit WV-CW3H 	Clear Dome Cover WV-CW2C
Data Multiplex Unit WJ-MP204C 	System Controller WV-CU360C
PS•Data Digital Video Duplex Color Multiplexers WJ-FS409 (9ch) WJ-FS416 (16ch) 	MATRIX SYSTEMS SYSTEM 850 SYSTEM 500 SYSTEM 150
PS•Data Digital Disk Recorder with 8ch Multiplexer WJ-HD200 	
Color Monitors WV-CM2080 51cm (20") WV-CM1780 41cm (16") WV-CM1480 36cm (14") WV-CM1420 34cm (13") WV-CM1020 22cm (9") 	Network Server Software WV-AS710

Trademarks

•Microsoft, Windows and Windows NT are registered trademarks of Microsoft Corporation in the U.S. and/or other countries.
 •Netscape, Netscape Navigator, Netscape ONE, the Netscape N and Ship's Wheel logos are registered trademarks of Netscape Communications Corporation in the U.S. and other countries.
 Other Netscape product names used in this document are also trademarks of Netscape Communications Corporation and may be registered outside the U.S.

• All TV pictures are simulated. •Weights and dimensions are approximate. • Specifications are subject to change without notice. • These products may be subject to export control regulations.

Panasonic

Panasonic Digital Communications & Security Company

Unit of Matsushita Electric Corporation of America

Security Systems Group

<http://www.panasonic.com/cctv>

Executive Office : Three Panasonic Way 2H-2, Secaucus, New Jersey 07094

Zone Office

Eastern : Three Panasonic Way, Secaucus, New Jersey 07094 (201) 348-7303


Central : 1707 N.Randal Road, Elgin, IL 60123 (847) 468-5205

Western : 6550 Katella Ave., Cypress, CA 90630 (714) 373-7840

SPECIFICATIONS

Model No.	WV-NW474S
Type	Surface mount type
Pick Up Device	768 (H) x 494 (V) pixels, interline transfer CCD
Scanning Area	4.8 (H) x 3.6 (V) mm, (Equivalent to 1/3" tube)
Scanning	525 lines / 60 fields / 30 frames
Scanning System	2 : 1 interlace
Synchronization	Internal / Line-Lock / VD2
Video Output	VBS 1.0V [p-p] / 75 Ω / NTSC composite signal / BNC connector
Resolution	Horizontal Vertical 480 lines at color imaging mode, 570 lines at B/W mode (at center) more than 350 lines (at center)
Minimum Illumination (at F1.4 Wide)	2.0 lux (0.2 fc) at color imaging, 0.2 lux (0.02 fc) at B/W mode 0.8 lux (0.08 fc) at color imaging and 0.1 lux (0.01 fc) at B/W mode with optional clear dome cover (WV-CW2C)
Signal to Noise Ratio	50dB (at AGC Off, Weight On, AP On)
Network Section	Image Resolution Image Process Image Refreshing Rate Traffic Control Protocols Supported OS Applicable Applicable Browsers 640 x 480, 640 x 240, 320 x 240, 160 x 120 pixel JPEG (Super Fine/Fine/Normal/Low image quality selectable) Fast/Middle/Slow/Very Slow 32 kbps, 64 kbps, 128 kbps, 256 kbps, 512 kbps, 1,024 kbps, Unlimited TCP/IP, HTTP, FTP, SMTP, DNS, DDNS, DHCP, ARP, BOOTP, NTP Windows 98 SE, Windows NT WORKSTATION 4.0 Service Pack6a, Windows 2000 Professional Service Pack2, Windows ME, or Windows XP Internet Explorer 5.5, 5.5 SP2, 6.0, or Netscape Communicator 4.73, 4.78
Functions	Camera Title Light Control Super Dynamic II Electronic Shutter AGC Electronic Sensitivity Up White Balance Motion Detector 16 character display (alphabet, numeric, symbols) ALC / ELC On / Off Off, 1/100, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000 sec. On (DNR-H) / On (DNR-L) / Off Off, Auto (x2, x4, x6, x10), Fix (x2, x4, x6, x10, x16, x32) ATW 1 / ATW 2 / AWC On / Off
Lens	Type Focal Length Aperture Ratio Min. Object Distance 2x variable focal lens 3.8 ~ 8.0 mm F1.4 (Wide) to F176, close / F1.8 (Tele) to F176, close 1.2 m (3.9 ft) ~ ∞
Power Source	24V AC, 60Hz
Power Consumption	8.6W (12.1W optional heater unit; WV-CW3H only)
Ambient Operating Temperature	-10°C ~ +50°C (14°F ~ 122°F) [-30°C ~ +50°C (-22°F ~ 122°F) with optional Heater Unit (WV-CW3H)]
Ambient Operating Humidity	Less than 90%
Dimensions (D) x (H)	ø175 x 153 mm (ø6-7/8" x 6-1/32")
Weight (approx.)	2.2 kg (4.84 lbs.)

APPEARANCE

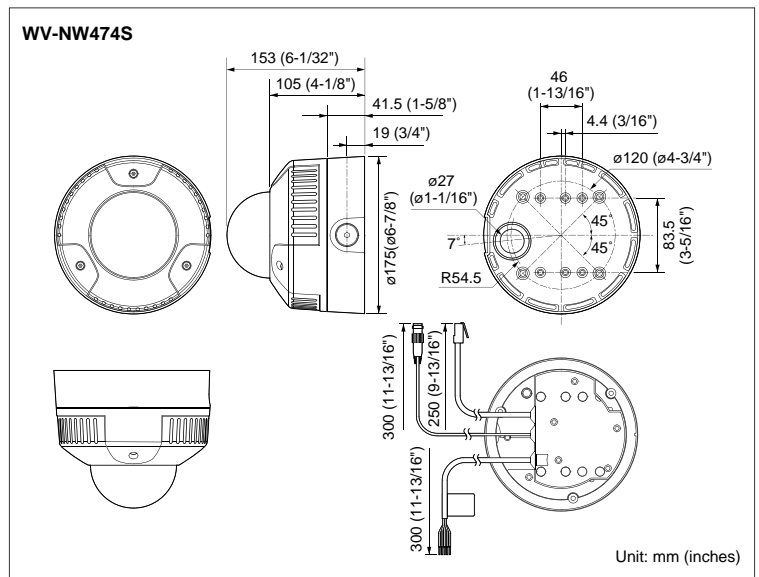

DISTRIBUTED BY:

PANASONIC CANADA INC.

5770 Ambler Drive, Mississauga, Ontario, L4W 2T3 Canada (905) 624-5010

PANASONIC SALES COMPANY

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

San Gabriel Industrial Park 65th Infantry Ave. KM. 9.5 Carolina, P.R. 00985 (809) 750-4300

Printed in Japan

WV-JHNW474SC(2P-519)